

e.box



ELECTRONIC CONTROL PANELS

DAB
WATER • TECHNOLOGY

The new series of control panels from e.box have been developed for guaranteeing reliability and simplicity of installation.

Thanks to the technological know-how of **DAB**, founded upon 40 years of experience in the sector of mechanics and electronics, to protect and command the systems of pumping has never been so easy.



e.box plus is an electronic control panel for the protection and automatic operation of one or two **submersible pumps or pressurizing both single-phase and three-phase**, installed in domestic, civil and industrial environments. Thanks to the possibility of adjusting the current, e.box is compatible with all models of pumps with a current between 1 and 12A with power up to 5.5Kw as reported by the products compatibility chart.

TECHNICAL DATA PLUS

Nominal tension of power supply: 1x230 V - 3x230 V & 3x400 V (automatic selection)

Frequency: 50 - 60 Hz

Maximum use of power: 5,5 kWatt + 5,5 kWatt

Maximum use of current: 12 A + 12 A

Starting capacitor - KIT supplied as an accessory

Limits of use ambient temperature: -10° C + 40° C

Limits of storage temperature: -25° C + 55° C


Relative humidity to the air: 90% a 20° C

Max altitude max: 1000 s.l.m.

Degree of protection: IP 55

Reference standard for the construction of the panels EN 60335-1

RELIABILITY AT YOUR COMMAND

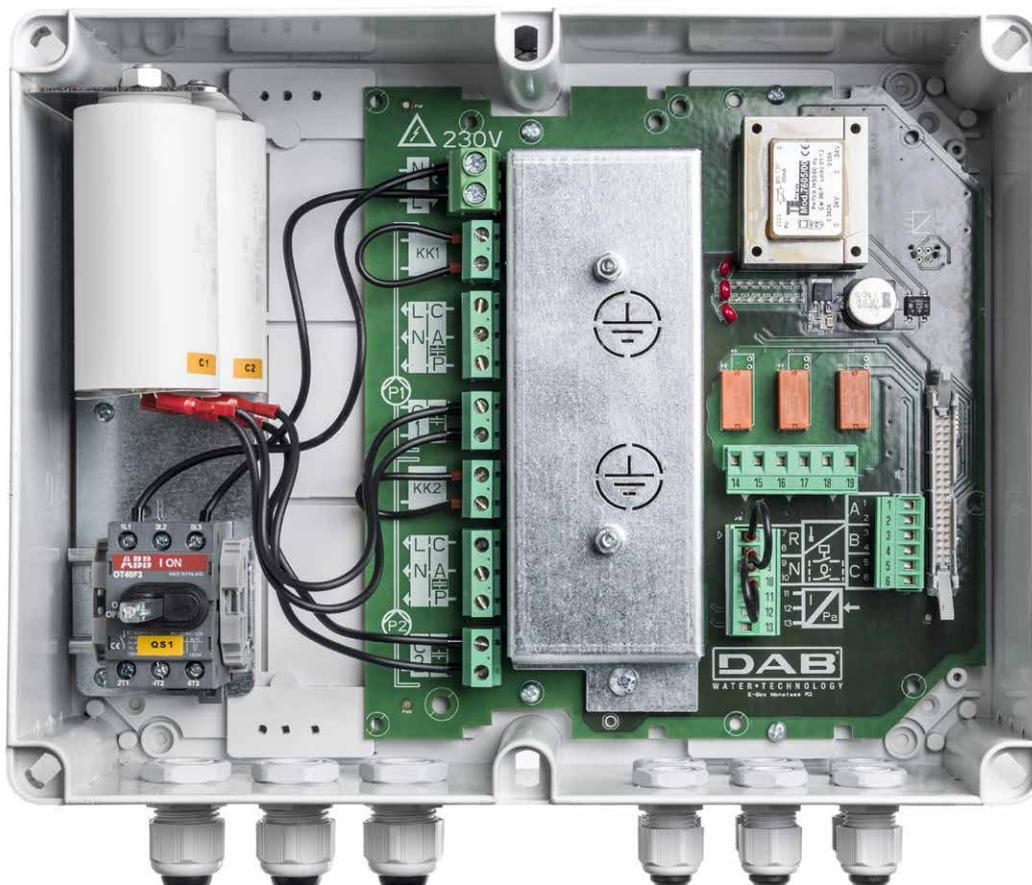

e.box basic is an electronic control panel for the protection and automatic operation of one or two **electronic submersible pumps or single-phase pressurization** for domestic applications. The e.box panel is compatible with all models of pumps with current between 1 and 12 A with power up to 2.2Kw as reported by the products compatibility chart.

BASIC TECHNICAL DATA

Nominal tension of power: 1x230 V

Frequency: 50 - 60 Hz

Maximum power range of use: 2,2 kWatt + 2,2 kWatt

Maximum operation of use: 12 A + 12 A

Starting capacitor - KIT supplied as an accessory

Limits of use ambient temperature: -10° C + 40° C

Limits of use storage temperature: -25° C + 55° C

Relative humidity to the air: 90% a 20° C

Max altitude: 1000 s.l.m.

Degree of protection: IP 55

Reference standard for the construction of the panels EN 60335-1



EMPTYING/FILLING FUNCTION



Ideal for piloting the pumping stations of filling / emptying the drainage of rainwater or waste water in general.

- Operation with bulb floats or standard, max 5 (2/3 for operation, 2 for alarm)
- Operation with level trasducer (0-10V / 4...20mA)
- Exchange of the starting order of the pumps at every start, every 24 hours or at predefined intervals.

PRESSURIZATION FUNCTION

Ideal for piloting the pressurization groups

- Operation with pressure switches, max 4 (2 for operation, 2 for protection)
- Operation with pressure sensors (0-10V / 4...20mA)
- Exchange of the starting order of the pumps at every start, every 24 hours or at predefined intervals.
- Compliant with KIWA requirement.



VERSATILITY AT YOUR COMMAND

PRODUCTS TABLE

	e.box plus D	e.box basic D	e.box plus	e.box basic
				
DISPLAY	●	●		
ELECTRICAL DATA	1 x 230 V / 3 X 230 - 400 V 50 - 60 Hz - 5,5 kW	1 X 230 V 50 - 60 Hz - 2,2 kW	1 x 230 V / 3 X 230 - 400 V 50 - 60 Hz - 5,5 kW	1 X 230 V 50 - 60 Hz - 2,2 kW
FEKA 600				
FEKA VS - VX - GL				
FEKA 1400 - 1800 - 2000 - 3000				
GRINDER				
DIG				
2 JET - 2 EURO - 2 EUROINOX - 2 K - 2 KVC				
2 NKV 15/20				


ACCESSORIES

	ORANGE FLASHING LIGHT 230V equipped with a 5W incandescent bulb		FLOAT ON/OFF 2 wire NO/NC Bulb or standard available with 5, 10, 20 meters of cable 3x1 H07RN-F
	ELECTRODE PROBE Suitable for conductive liquids with a maximum temperature of +40°C To be connected with a 1,5 mm ² cable - 550V insulation Sensibility ≤ 53 Kohm		LEVEL TRANSDUCER Pressure sensor for applications with clean and sewage water. Calibration range: 0-0,5 bar / 4-20 Current rating/ Voltage 8-32VDC / cable 20m
	PRESSURE SWITCH FOR PROTECTION AGAINST DRY RUNNING		CAPACITOR KIT



3" DISPLAY

- Step-by-step guides the installer during the first installation settings
- Allows the consultation of all historical errors of the pumps and panels
- Facilitates monitoring of pumps and sensors and the setting of levels of start/stop of the pumps
- Allows the choice of language and a password to block the settings made

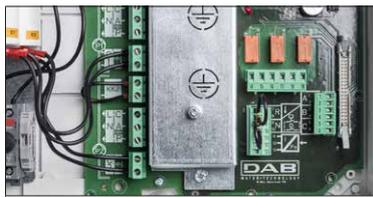

BASIC SINGLE-PHASE MODEL

In typical domestic installations where the needs are different, there is E.BOX BASIC (single-phase only) in the version with or without display, with all the features of the PLUS costing less.



TECNOLOGY AT YOUR COMMAND



AUTOMATIC VOLTAGE SELECTOR

With just one model in stock, it will be possible to manage in a completely automatic way both single and three-phase pumps.



NEW PUSH BUTTON

With the new user interface e.box is now more intuitive and immediate. Understanding the status of the pumps and the errors related to them or the system has never been easier.



PREDISPOSED FOR THE MONITORING VIA GSM

It is possible to connect to a GSM card to check via SMS the status of the pumps and the panels.

**DAB PUMPS LTD.**

Unit 4 and 5, Stortford Hall Industrial Park,
Dunmow Road,
Bishops Stortford,
Herts
CM23 5GZ - UK
salesuk@dwtgroup.com
Tel. +44 1279 652 776
Fax +44 1279 657 727

**DAB PUMPS B.V.**

Brusselstraat 150
B-1702 Groot-Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353
Fax +32 2 4669218

**DAB PUMPS B.V.**

Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwtgroup.com
Tel. +31 416 387280
Fax +31 416 387299

**DAB PUMPEN DEUTSCHLAND GmbH**

Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwtgroup.com
Tel. +49 2151 82136-0
Fax +49 2151 82136-36

**DAB PUMPS IBERICA S.L.**

Avenida de Castilla nr.1 Local 14
28830 - San Fernando De Henares - Madrid
Spain
info.spain@dwtgroup.com
Tel. +34 91 6569545
Fax: +34 91 6569676

**DAB PRODUCTION HUNGARY KFT.**

H-8800
Nagykanizsa, Buda Ernó u.5
Hungary
Tel. +36 93501700

**DAB PUMPS POLAND Sp. z o.o.**

Mokotow Marynarska
ul. Postępu 15C
02-676 Warszawa - Poland
Tel. +48 223 81 6085

**DAB UKRAINE Representative Office**

Regus Horizon Park
4 M. Hrinchenka St, suit 147
03680 Kiev - Ukraine
Tel. +38 044 391 59 43

**OOO DWT GROUP**

Novgorodskaya str, 1, bld G, office 308
127576 Moscow - Russia
info.russia@dwtgroup.com
Tel. +7 495 122 00 35
Fax +7 495 122 00 36

**DAB PUMPS INC.**

3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1-843-824-6332
Toll Free 1-866-896-4DAB (4322)
Fax 1-843-797-3366

**DWT SOUTH AFRICA**

Podium at Menlyn,
3rd Floor, Unit 3001b, 43 Ingersol Road,
C/O Lois and Atterbury street,
Menlyn, Pretoria, 0181 - South-Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997
Fax +27 12 361 3137

**DAB PUMPS CHINA**

No.40 Kaituo Road, Qingdao Economic & Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
info.china@dwtgroup.com
Tel. +8653286812030-6270
Fax +8653286812210

**DAB PUMPS DE MÉXICO, S.A. DE C.V.**

Av Gral Álvaro Obregón 270, oficina 355
Hipódromo, Cuauhtémoc 06100
México, D.F.
Tel. +52 55 6719 0493